

# EZ Clean Fruit & Vegetable Processing Conveyor

## FEATURES :


- Sanitary EZ Clean Hygienic Design
- Designed to exceed AMI-USDA Guidelines
- Engineering adaptations available
  - Cutting Boards
  - Side Leaves
- USDA-FDA- Manual Clean Belts
- Wide Range Configurations



## BENEFITS:

- Quick Clean Features
- Direct Drive "Blue Belts"
- Eliminates belt tracking problems
- Easy to clean in place
- Endures wet, harsh environments
- Quiet - reducing noise in the plant
- Reduces power & environmental costs

Conveyor Configurations	
USDA-FDA Food Contact Applications	Elevator Feeder    Dewater Belt Cutting Belt        Grading Belts Transfer Belt        Sort Belt Belt Feeder          Grading
Packaging & Processing Appl.	Infeed Belts Merge/Diverge Feed Hopper

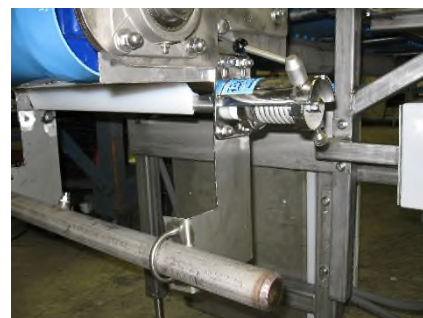

□ CDS LIPE \* 800-448-7822



# EZ Clean Conveyor

## Belts & Surfaces

Cleated Incline      Chemical/Oil/Cut Resistant  
 Indexing              Dewatering  
 USDA- FDA Meat, Poultry & Dairy Belts

## Frame:

304 SS Central Tube –Open Deck Construction

## Bearings:

Double-seal, sealed for life ball bearings.

**Supports:** Several styles to choose from including Portable and fixed Sanitary Style Legs. Ceiling hangers & custom supports.


**Drive Configurations:** Multiple drive locations including top mount, side mount, bottom mount, shaft offset mount. Direct Belt Drive Can Push a direct drive belt. Epoxy Painted & Stainless Motor/Reducers available.

**Hoppers & Side Leaves:** 3, 6 and 8 cu ft hoppers standard. 6" 12" and 18" Side leaves standard.

**Drive Types:** Gearmotor, parallel shaft and right angle drives are used. Multiple voltages, CE, NEMA frames are available.

**Pulley:** Sprocket- Direct Belt Drive,


**Controls:** Standard Nema Enclosures available w/ start/stop, e stop, indexing and variable speed controls

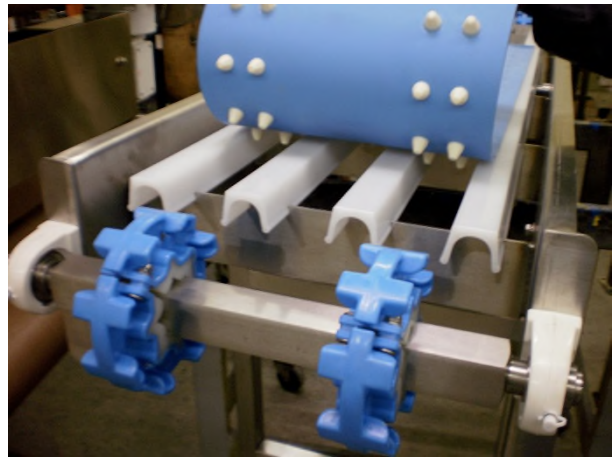

\* Features direct driven belt and open deck construction

Model	Belt W"	Belt L "
SBM1224 to SBM241200	12"	18" to 1200"
SBM1824 to SBM241200	18"	24" to 1200"
SBM2424 to SBM241800	24"	24" to 1200"
SBM3224 to SBM241800	32"	24" to 1200"
SBM3624 to SBM241800	36"	24" to 1200"
SBM4824 to SBM241800	48"	24" to 1200"
SBM6036 to SBM241800	60"	36" to 1200"

\* Note: Any width can be accommodated in any Increment between 12" and 60". Conveyor length subject to belt live load requirements.

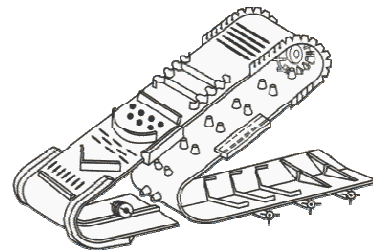

Multiple Belt Attachment Options

